

ISOMAG

The friendly magmeter

DATA SHEET

MV110W




CE

ISOIL 
INDUSTRIA

INDEX





TECHNICAL DATA	3
OVERALL DIMENSIONS	4
OVERALL DIMENSIONS (STAINLESS STEEL VERSION)	7
MV110W EXPLODED LAYOUT	9
MV110W CONSTRUCTION (STAINLESS STEEL VERSION)	10
MAIN PAGES VISUALISATION	11
ELECTRICAL CONNECTIONS	12
DIGITAL INPUT	13
DIGITAL OUTPUTS	13
FUNCTIONS MENU	14
MI-001 OIML R49 CLASS1: MV110W	19
MI-001 OIML R49 CLASS 2: MV110W	20
MI-004 OIML R75 CLASS1: MV110W	23
HOW TO ORDER	25

TECHNICAL DATA


OVERALL FEATURES	
Suitable For	<input type="checkbox"/> All the ISOMAG® sensors, up to DN 1000
Minimum conductivity	<input type="checkbox"/> 5 µS/cm
Altitude	<input type="checkbox"/> -200 m up to 4000 m
Ambient Temperature	<input type="checkbox"/> -20... +60°C / -4... +140 °F - Aluminium housing <input type="checkbox"/> -10... +50°C / +14...+122 °F - Reinforced Nylon
Humidity Range	<input type="checkbox"/> 0÷100%
STANDARD FEATURES	
Housing materials	<input type="checkbox"/> Painted Aluminium die casting <input type="checkbox"/> Nylon reinforced with 15% of fiber glass <input type="checkbox"/> AISI304 Stainless Steel
Protection Rate	<input type="checkbox"/> IP 67
Power Supply/Consumption	<input type="checkbox"/> 100-240 V~ (20VA) – 44-66 Hz
Cable Gland	<input type="checkbox"/> N° 5 cable gland PG 11
Full scale value	<input type="checkbox"/> 0,4...10m/s
Dig. Input/output	<input type="checkbox"/> N°1 , programmable output (i.e. Totalizer reset) / N°1 digital input
Data Storage	<input type="checkbox"/> Values storing system in case of power failure
Galvanic Isolation	<input type="checkbox"/> All the inputs/outputs are galvanically isolated from power supply up to 250 V
Programming Plug In	<input type="checkbox"/> USB port for the connection to PC (USB cable type A/USB MINI B is required for the programming)
Bi-Directional	<input type="checkbox"/> Yes
Diagnostic Funct.	<input type="checkbox"/> Yes
Empty Pipe Detect.	<input type="checkbox"/> Yes
CE Certification	<input type="checkbox"/> Yes
OPTIONAL FEATURES (CHECK HOW TO ORDER, AT LAST PAGE, FOR MORE DETAILS)	
Version	<input type="checkbox"/> Compact <input type="checkbox"/> Separate
Protection Rate	<input type="checkbox"/> IP 68
Conn. Sensor Cable	<input type="checkbox"/> CABLE C014 for separate version
LCD Display	<input type="checkbox"/> Graphic display 128x64 pixels back light, 3 programming keys
Power Supply/Consumption	<input type="checkbox"/> Power supply : 100 ... 240 VAC 44/66 Hz <input type="checkbox"/> Power supply : 24 ... 36 VAC/VDC 0...45/66 Hz <input type="checkbox"/> Power supply : 12...48 VDC <input type="checkbox"/> Power supply : 100 ... 240 VAC 44/66 Hz + 1 Rechargeable Battery <input type="checkbox"/> Power supply : 24 ... 36 VAC/VDC 0...44/66 Hz + 1 Rechargeable Battery <input type="checkbox"/> Power supply : 12...48 VDC + 1 Rechargeable Battery
MID Certifications	<input type="checkbox"/> MI-001  <input type="checkbox"/> MI-004
ACCURACY	
Measurements tolerance	<input type="checkbox"/> Flow rate (volume) = ±0,05% v.l. <input type="checkbox"/> Frequency Out = ± 0,08% v.l.
Accuracy (whole system converter+sensor)	<input type="checkbox"/> See table below

OVERALL DIMENSIONS


Compact version

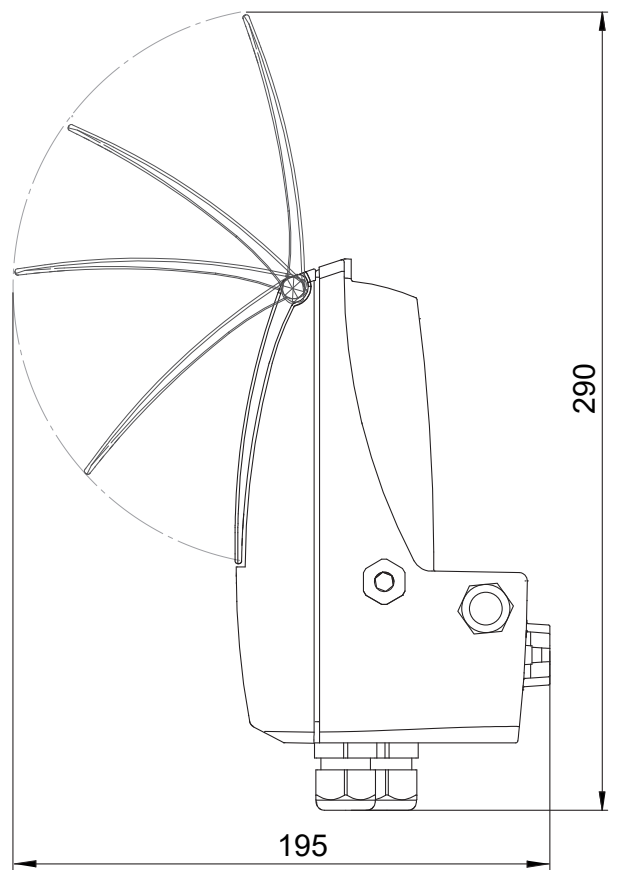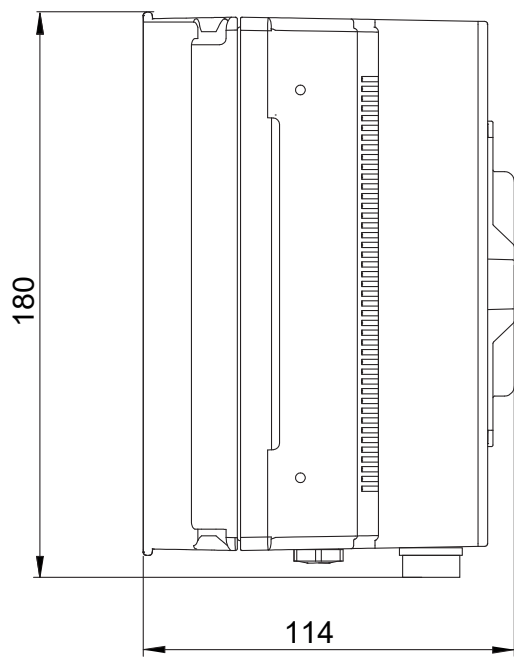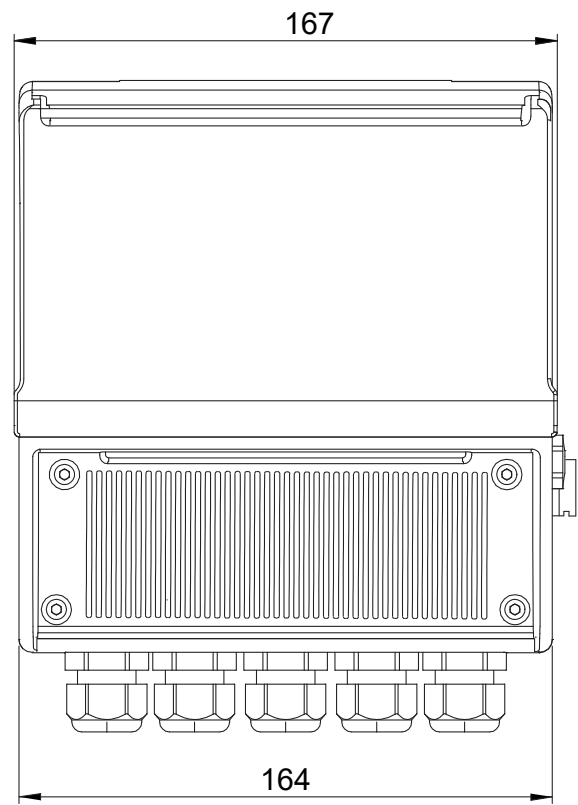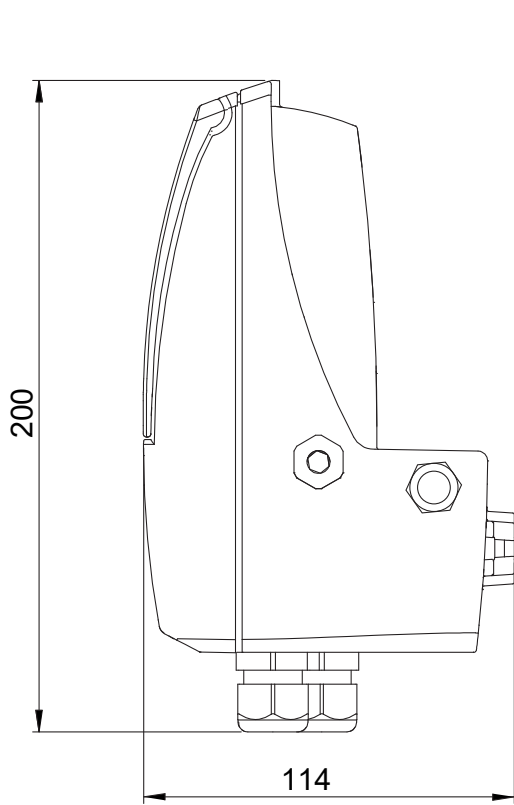


Separate (wall) version

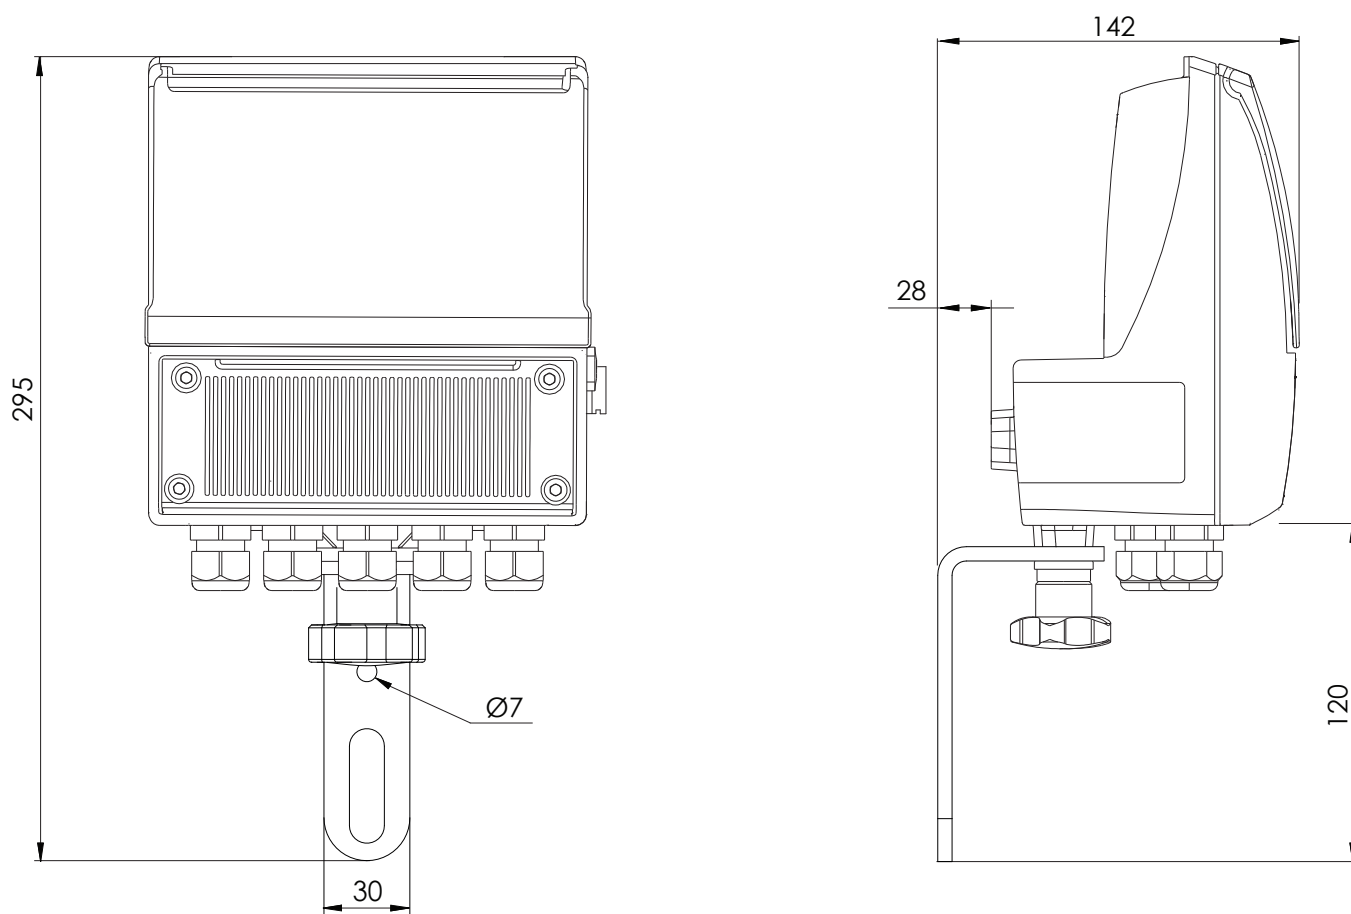

Horizontal version




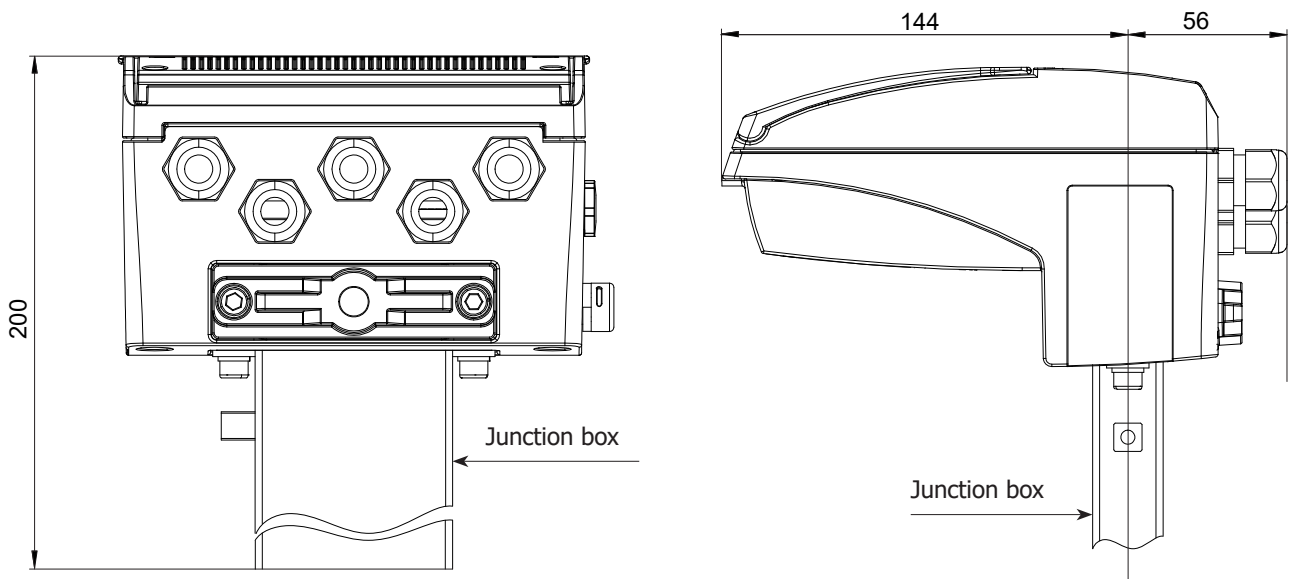


Vertical version

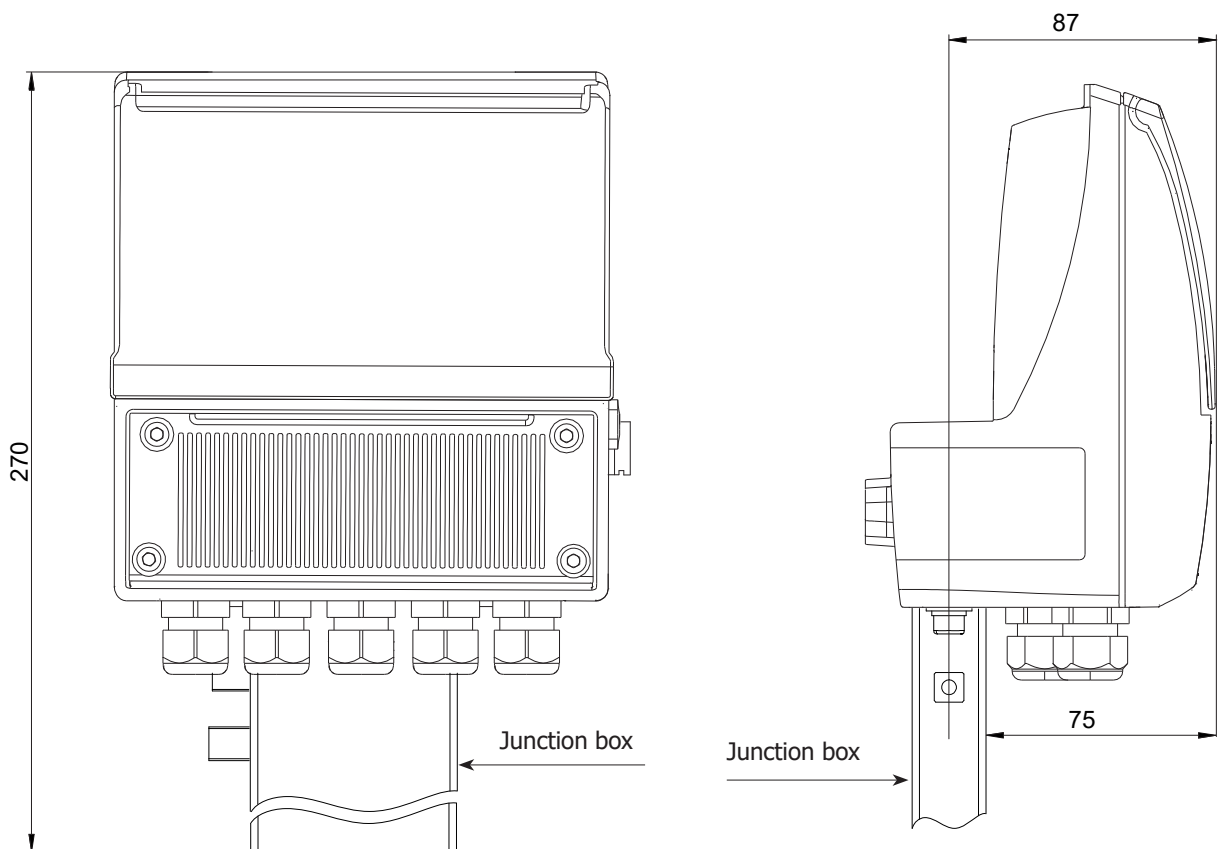





OVERALL DIMENSIONS (STAINLESS STEEL VERSION)

Compact Version

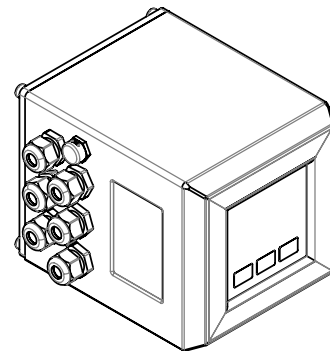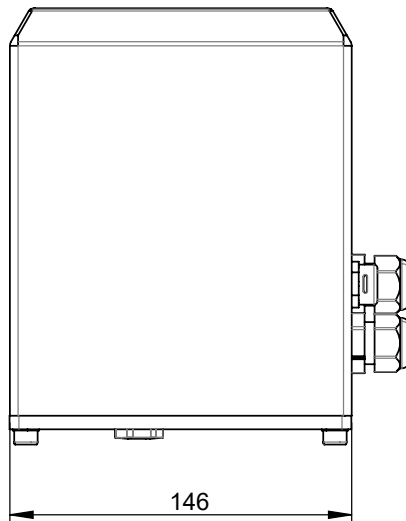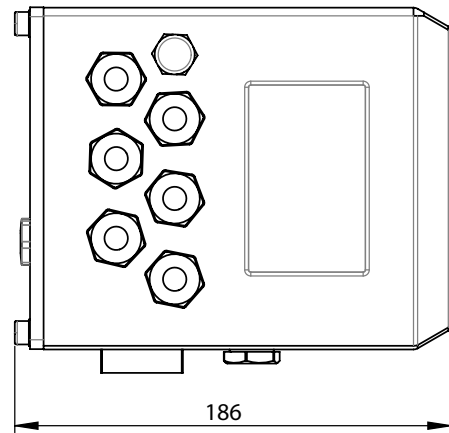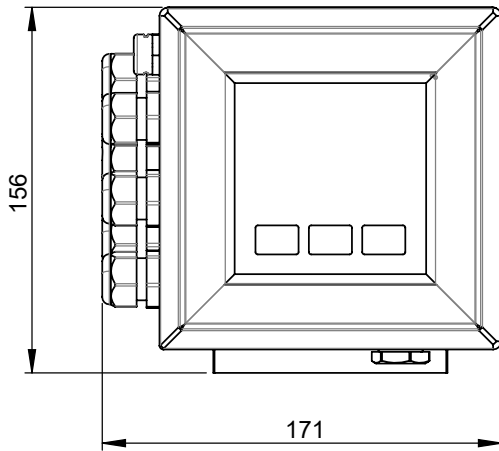

The manufacturer guarantees only English text available on our web site www.isoil.com


Separate Version

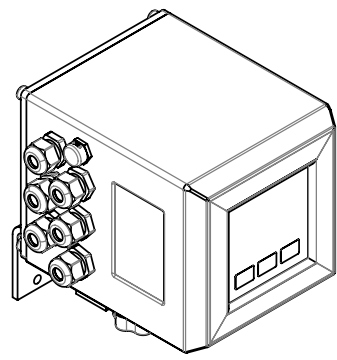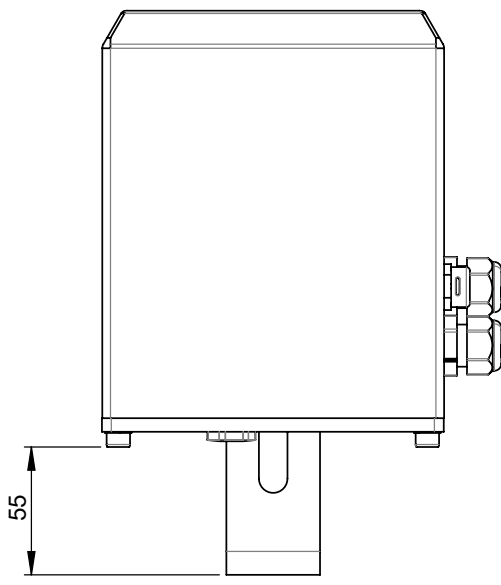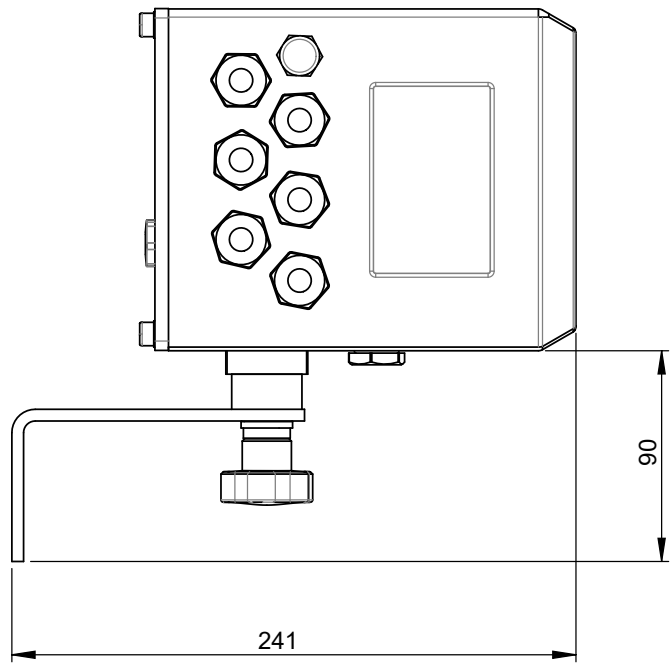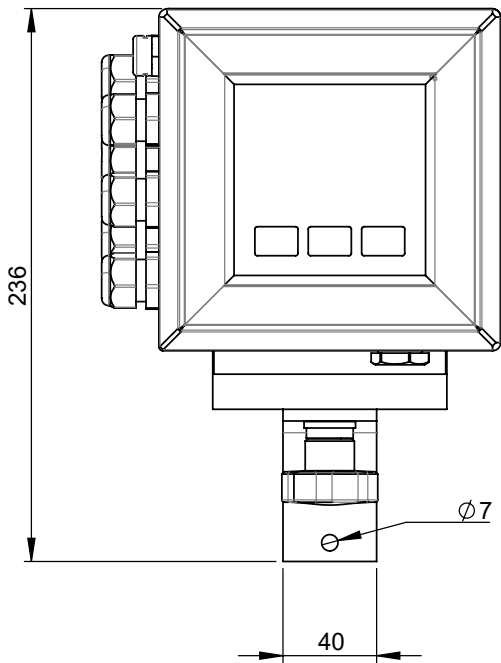


The manufacturer guarantees only English text available on our web site www.isoil.com

MV110W EXPLODED LAYOUT


Terminal block cover

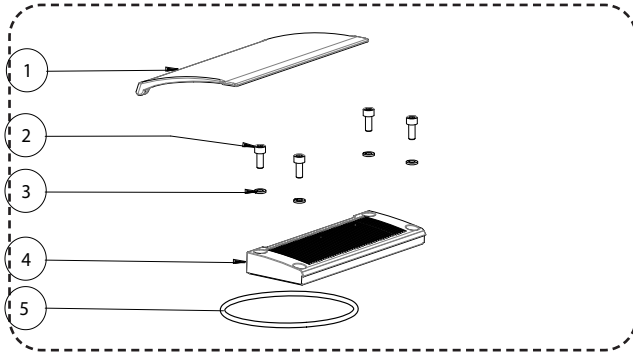


Main housing cover

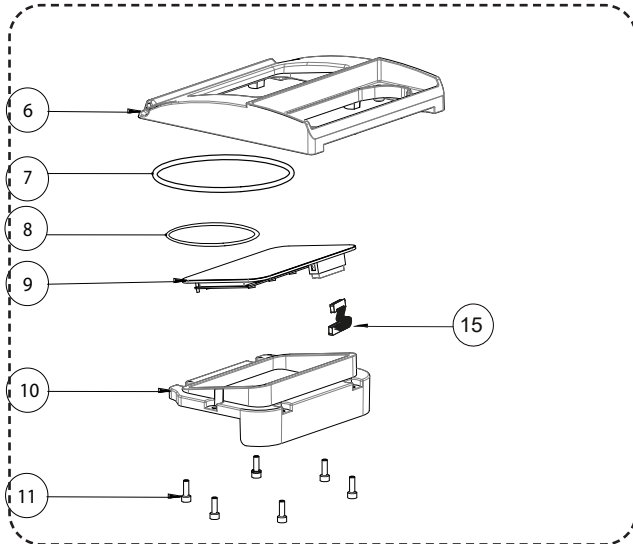

PCB MV210

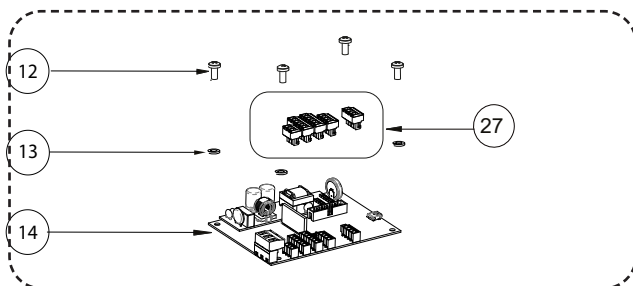


Main housing

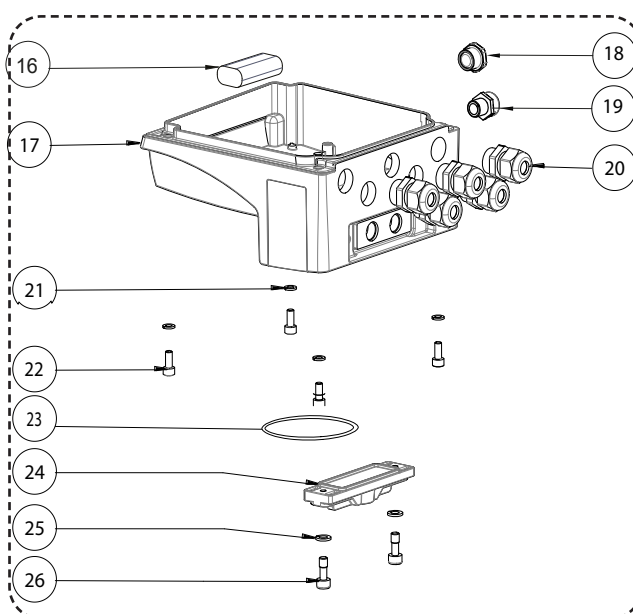

POS.	DESCRIPTION	
	PA6 VERSION	ALLUMINIUM VERSION
1	PROTECTION COVER	
2	VITE M4x12	VITE M5x12
3	GROWER Ø4	GROWER Ø5
4	TERMINAL COVER	TERMINAL COVER
5	O-RING-4400	
6	HOUSING COVER	HOUSING COVER
7	O-RING-4700 (HOUSING COVER)	
8	O-RING-117x3 (DISPLAY)	
9	DISPLAY	
10	FIXING DISPLAY FRAME (MATERIAL PA06)	
11	SELF-TAPPING SCREW 4x10	TRILOBO SCREW 4x10
12	SELF-TAPPING SCREW 4x10	TRILOBO SCREW 4x10
13	GROWER Ø4	SPRING WASHER Ø4
14	PCB MV210	
15	FLAT CABLE	
16	LITHIUM BATTERY	
17	PA6 MAIN HOUSING	ALUMINIUM MAIN HOUSING
18	PG9 CAP	
19	ANTICORROSION CAP	
20	PG11 CABLE GLAND CABLE DIAMETER: Ø5-Ø10mm	
21	GROWER Ø4	SPRING WASHER Ø5
22	SCREW M4x12	SCREW M5x12
23	O-RING-155	
24	VERSION CAP (MATERIAL PA06)	
25	GROWER Ø6	
26	SCREW M6x16	
27	TERMINAL BLOCK SOLID WIRE: 26-16 AWG / 0.129-1.31 mm ² STRANDED WIRE: 26-16 AWG / 0.129-1.31 mm ² TORQUE: 3.0 Lb.In / 0.34 Nm	


MV110W CONSTRUCTION (STAINLESS STEEL VERSION)

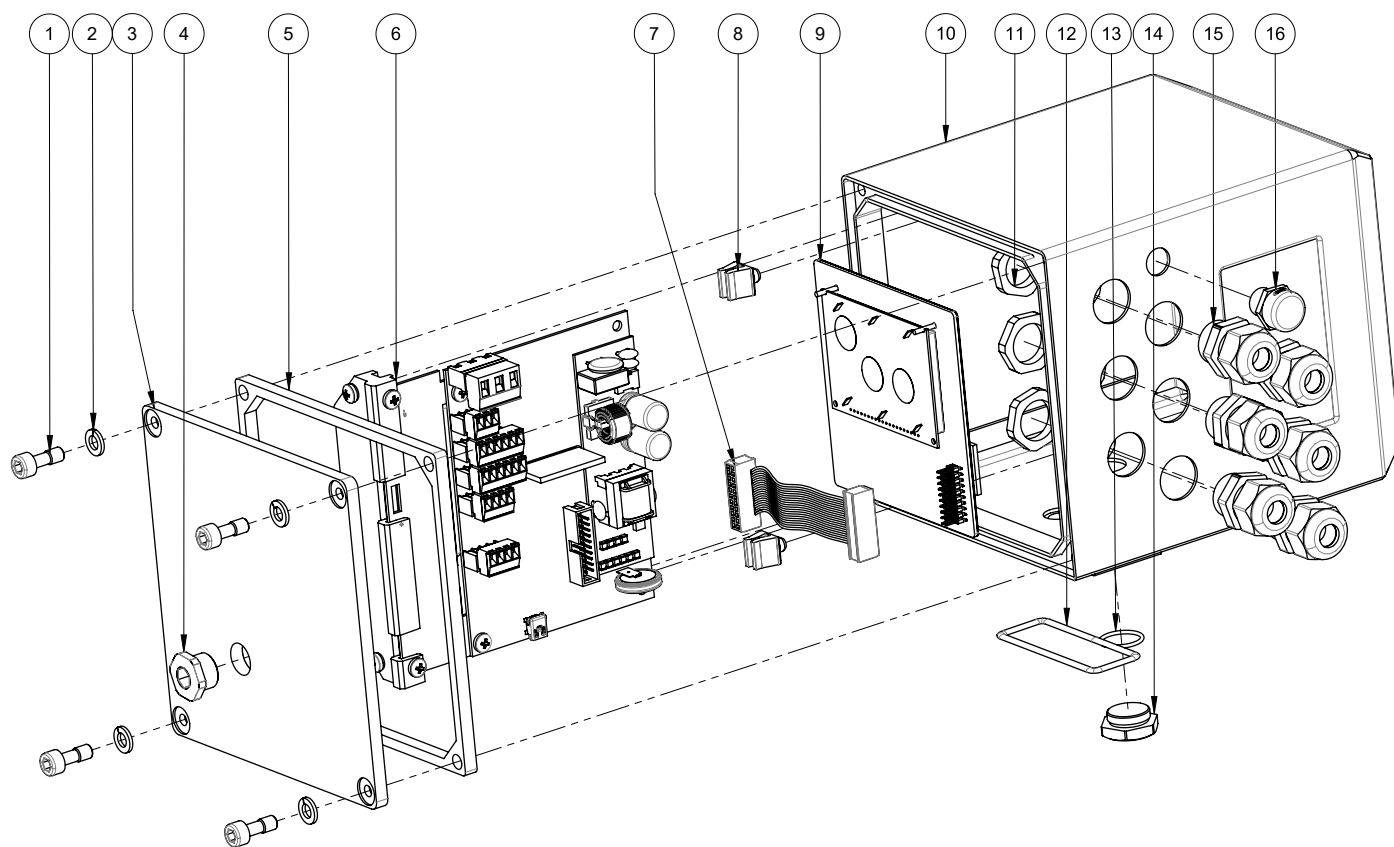

POS.	DESCRIPTION
1	SCREW M6X16
2	GROWER Ø 6
3	POLISHED COVER
4	PG9 CAP IP68
5	GASKET FOR Stainless steel HOUSING
6	BOARD FRAME M3C
7	FLAT CABLE
8	BOARD FIXING CLIPS
9	DISPLAY/BLIND
10	POLISHED Stainless steel HOUSING
11	PG11 NUT
12	FLAT GASKET O-RING 155
13	O-RING ORM 0160-15 Ø16X1.5
14	Stainless steel CAP M18X0.75
15	PG11 CABLE GLANDS
16	ANTICONDENSATION CAP


MAIN PAGES VISUALISATION

Different visualization possibilities by simply pressing of a key.

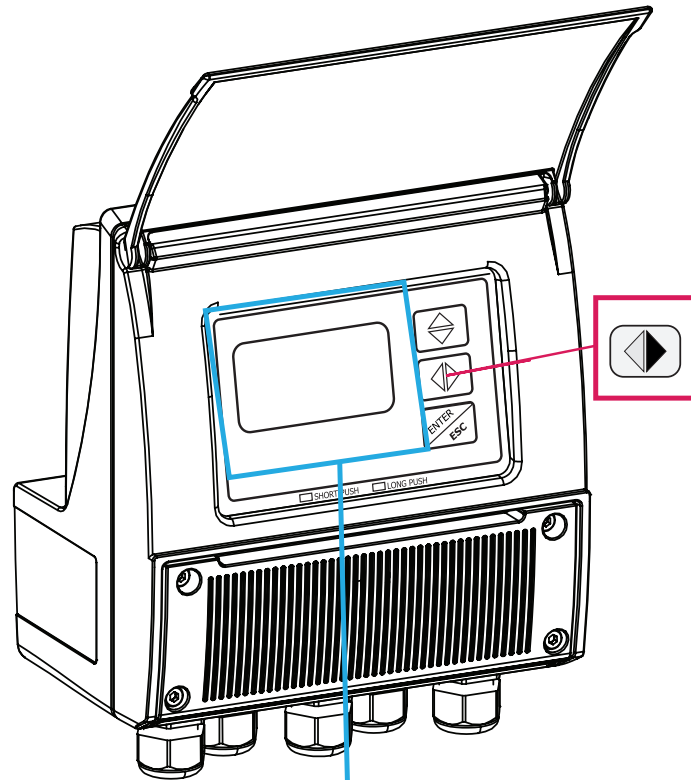


The manufacturer guarantees only English text available on our web site www.isoil.com

ELECTRICAL CONNECTIONS

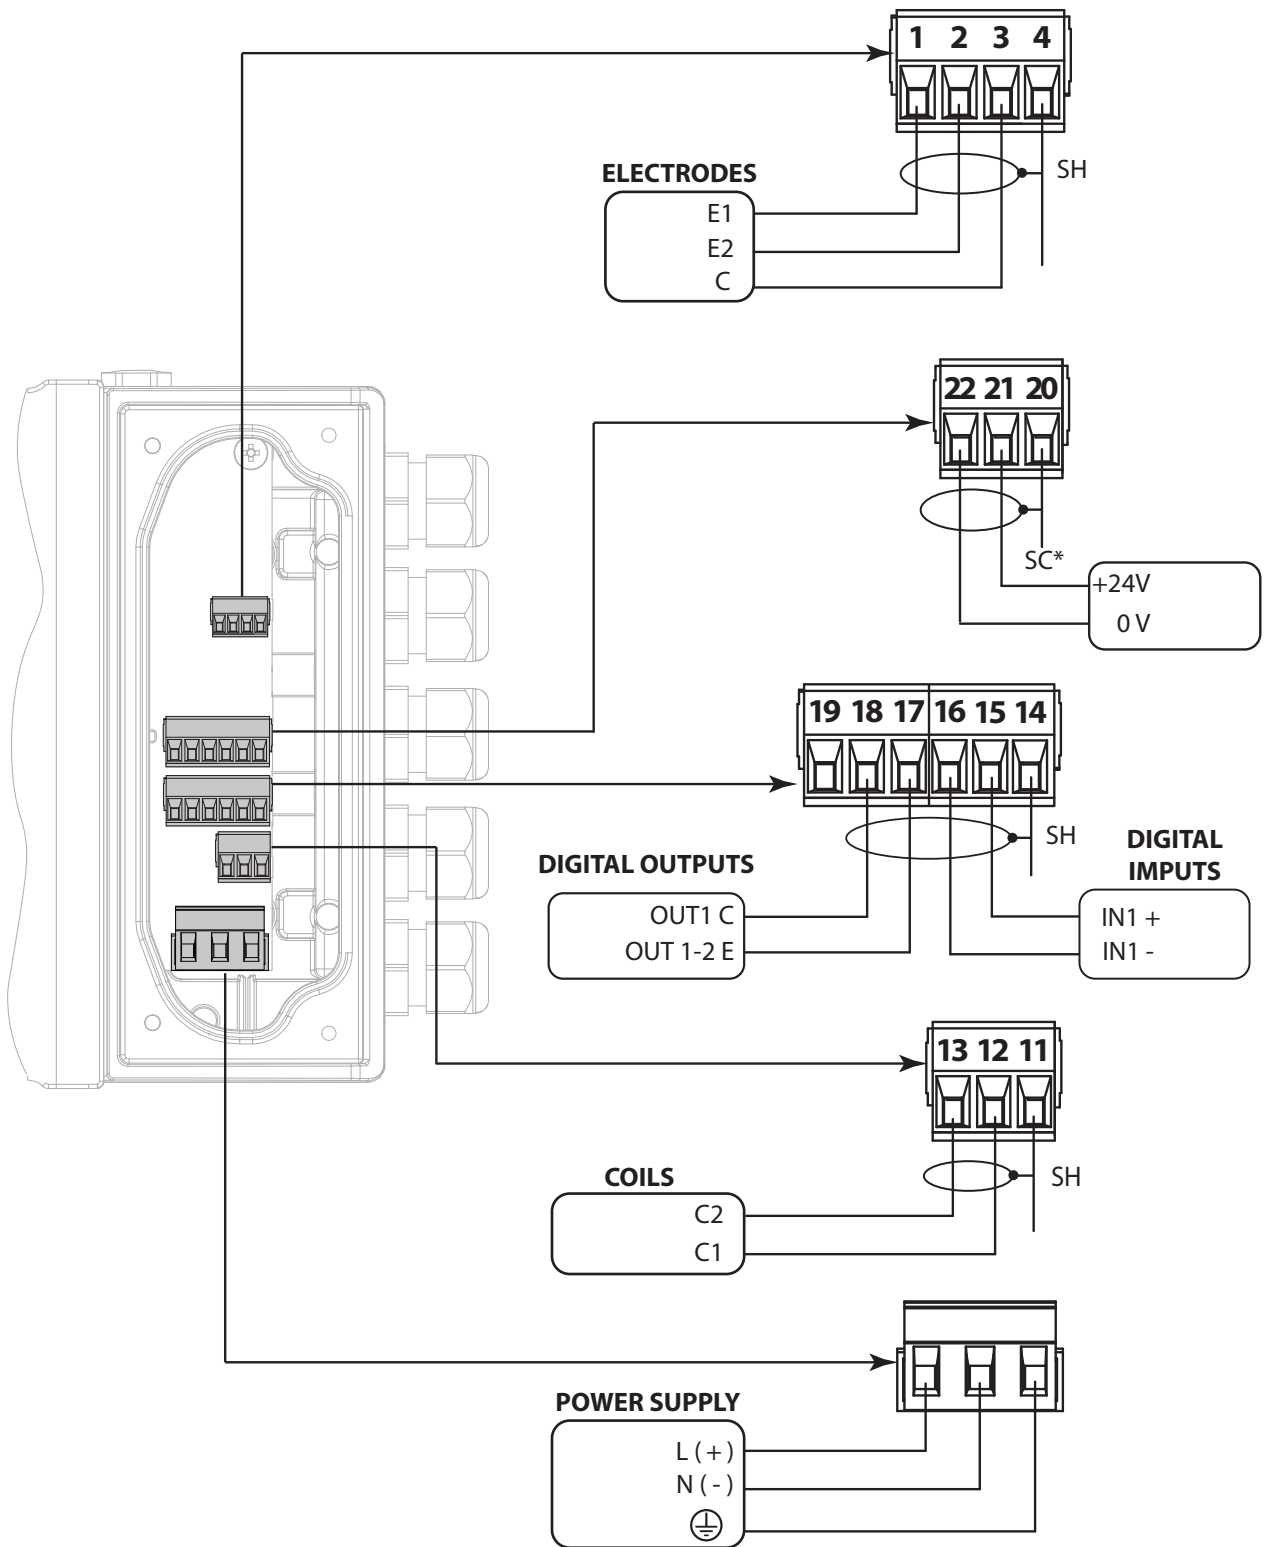


The manufacturer guarantees only English text available on our web site www.isoil.com

DIGITAL INPUT

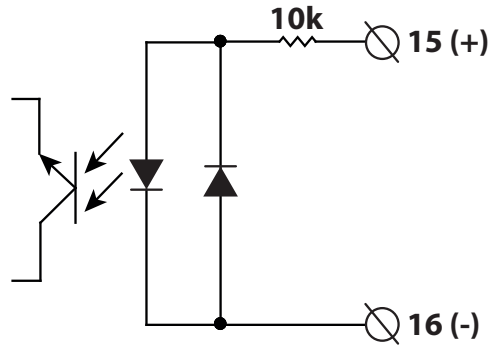

DIGITAL OUTPUTS

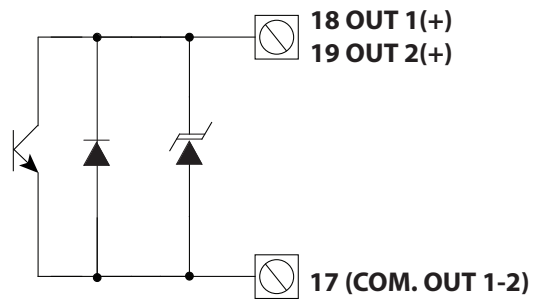

FUNCTIONS MENU

SENSOR

MAIN MENU			
1-Sensor			
SENSOR			
S. model =	0	1.1	Sensors model: Enter the first two characters of the serial number of the sensor
Lining =	UNSPEC.	1.2	Flow sensor lining material type
S. type =	FULL BORE	1.3	Type of sensor: fullbore or insertion
u. type =	METRIC	1.4	Type of measure units for sensor parameter: metric or imperial
Diam	mm 00025.0	1.5	Insert ND of sensor (0-2500)
KA =	+00.9637	1.6	Calibration data of sensor visualized on sensor's label
KA- =	-04.4904	1.7	Calibration data of sensor for negative flow
KZ =	+0000000	1.8	Sensor coefficient KZ (zero point)
KD =	+0000000	1.9	Sensor coefficient KD
Ins. position =	0	1.10	Insertion position
KP Dinamic =	OFF	1.11	KP dynamic, coefficient for insertion
Ki =	01.8727	1.12	Sensor coefficient Ki
Kp =	01.0000	1.13	Sensor coefficient Kp
KC =	1.00000	1.14	Sensor coefficient KC
C.curr = mA	025.0	1.15	Sensor excitation current
C.Reg.PB =	004	1.16	Current regulator proportional band
C.Reg.DH =	008	1.17	Current regulator derivation constant
S. Freq. = Hz	50	1.18	Measure sampling frequency
Preamplif.	OFF	1.19	Enables the preamplifier
E.P Detect =	ON	1.20	Enables the empty pipe detection feature
R max = kohm	0500	1.21	Empty pipe detection threshold
El. Cleaning =	OFF	1.22	Electrode cleaning
S. cable =	m 000	1.23	Sensor connecting cable length
S. err. delay =	010	1.24	Signal error delay (n. sample)
Sens. verify =	OFF	1.25	Automatic sensor verify enable
Zeropoint cal.		1.26	Pipe hydraulic zero calibration
KL	00.0000000	1.27	Linearization coefficient

UNITS

MAIN MENU			
1-Sensor			
2-Units			
UNITS			
Diam.	mm	2.1	Nominal diameter measure unit
S.cable	m	2.2	Cable length on separate version
FR.unit	METRIC	2.3	Flowrate type measure unit: metric or not metric
PI1 unit	METRIC	2.4	Pulse 1 type measure unit: metric or not metric
T+ unit	METRIC	2.5	Total direct totalizer measure unit type: metric or not metric
T+ unit	g	2.6	Total direct totalizer measure unit
T+ D.P	3	2.7	Total direct totalizer decimal point position
P+ unit	METRIC	2.8	Partial direct totalizer measure unit type: metric or not metric
P+ unit	g	2.9	Partial direct totalizer measure unit
P+ D.P	3	2.10	Partial direct totalizer decimal point position
T- unit	METRIC	2.11	Total reverse totalizer measure unit type: metric or not metric
T- unit	g	2.12	Total reverse totalizer measure unit
T- D.P	3	2.13	Total reverse totalizer decimal point position
P- unit	METRIC	2.14	Partial reverse totalizer measure unit type: metric or not metric
P- unit	g	2.15	Partial reverse totalizer measure unit
P- D.P	3	2.16	Partial reverse totalizer decimal point position
Temp.unit	°C	2.17	Temperature measure unit
Mass units	ON	2.18	Enable/disable the selection of mass units on full scale set
Sg=kg/dm3	1.0000	2.19	Specific gravity coefficient

SCALES

```

MAIN MENU
1-Sensor
2-Units
3- Scales
4-Measure
5-ALARMS
6-Inputs
7-
8-
9-
10-
11-
12-
13-
    
```

SCALES	
FS1 g/s	4908.7
FS2 g/s	4908.7
Pls1=g	1000.00
Tpls1=ms	0050.0
Pls2=g	1000.00
Tpls2=g	0050.0
Frq1=Hz	1000.00
Frq2=Hz	1000.00

- 3.1 Full scale flow rate 1
- 3.2 Full scale flow rate 2
- 3.3 Pulse value on channel 1
- 3.4 Duration of the pulse generated on channel 1
- 3.5 Pulse value on channel 2
- 3.6 Duration of the pulse generated on channel 2
- 3.7 Full scale frequency for channel 1 (0.1Hz-1000.0Hz)
- 3.8 Full scale frequency for channel 2 (0.1Hz-1000.0Hz)

MEASURES

```

MAIN MENU
1-Sensor
2-Units
3- Scales
4- Measure
5-ALARMS
6-Inputs
7-
8-
9-
10-
11-
12-
13-
    
```

MEASURES	
Damping	SMART
Cut-off= %	00.1
DT Min.	ON
T1HC enable	ON
T1HC	OFF

- 4.1 Measure filter
- 4.2 Low flow zero threshold: 0-25% of full scale value
- 4.3 Automatic calibration verify
- 4.4 Automatic change of measurement range
- 4.5 High immunity inputs

ALARMS

```

MAIN MENU
1-Sensor
2-Units
3- Scales
4- Measure
5-ALARMS
6-Inputs
7-
8-
9-
10-
11-
12-
13-
    
```

ALARMS	
Max+ = dm3/s	OFF
Max- = dm3/s	OFF
Min+ = dm3/s	OFF
Min- = dm3/s	OFF
Hysteresis=%	03
mA v.alarm=%	000
Hz v.alarm=%	000

- 5.1 Maximum value alarm set for direct flow rate
- 5.2 Maximum value alarm set for reverse flow rate
- 5.3 Minimum value alarm set for direct flow rate
- 5.4 Minimum value alarm set for reverse flow rate
- 5.5 Hysteresis threshold set for the minimum and maximum flow rate alarms
- 5.6 Current output value in case of failure
- 5.7 Frequency output value in case of alarms

INPUTS

```

MAIN MENU
1-Sensor
2-Units
3- Scales
4- Measure
5-ALARMS
6-Inputs
7-
8-
9-
10-
11-
12-
13-
    
```

INPUTS	
T+ reset	OFF
P+ reset	OFF
T- reset	OFF
P- reset	OFF
Count lock	OFF
Meas.lock	OFF
Calibration	OFF
Range change	OFF

- 6.1 Total direct (positive) flow totalizer reset enable
- 6.2 Partial direct (positive) flow totalizer reset enable
- 6.3 Total reverse (negative) flow totalizer reset enable
- 6.4 Partial reverse (negative) flow totalizer reset enable
- 6.5 Totalizer counting lock command
- 6.6 Measure zero lock command
- 6.7 Calibration external command
- 6.8 Range change external command

OUTPUTS

```

MAIN MENU
1-Sensor
2-Units
3-Scales
4-Measure
5-Alarms
6-Inputs
7-Outputs
8-Communication
9-Display
10-Data logger
11-Functions
12-Diagnostic
13-System
    
```

OUTPUTS
Out1 PULSES+

7.1 Output 1 functions

DISPLAY

```

MAIN MENU
1-Sensor
2-Units
3-Scales
4-Measure
5-Alarms
6-Inputs
7-Outputs
8-Communication
9-Display
10-Data logger
11-Functions
12-Diagnostic
13-System
    
```

DISPLAY
Language EN
Contrast 5
Disp.time=s 020
D.rate=Hz 5
Disp. Fn. 1
Disp.lock ON
Part. Tot ON
Neg. Tot. ON
Net tot. ON
Disp.date ON
Quick start ON

- 9.1 Choice of the language
- 9.2 Display contrast
- 9.3 Display/keyboard inactivity time
- 9.4 Display updating frequency: 1-2-5-10 Hz
- 9.5 Display function number
- 9.6 Display function selection lock
- 9.7 Partial totalizer enable
- 9.8 Negative totalizer enable
- 9.9 Net totalizer enable
- 9.10 Time and date display enable
- 9.11 Quick start menu visualization

FUNCTIONS

```

FUNCTIONS
T+ reset
P+ reset
T- reset
P- reset
Load Sens. F. def
Load Conv. F. def
Save Sens. F. def
Save Conv. F. def
Calibration
9-Display
10-Data logger
11-Functions
12-Diagnostic
13-System
    
```

- 11.1 Execute immediate reset of total direct totalizer
- 11.2 Execute immediate reset of partial direct totalizer
- 11.3 Execute immediate reset of total reverse totalizer
- 11.4 Execute immediate reset of partial reverse totalizer
- 11.5 Load sensor factory default
- 11.6 Load converter factory default
- 11.7 Save sensor factory default values
- 11.8 Save converter factory default values
- 11.9 Execute immediate internal circuit calibration

DIAGNOSTIC

DIAGNOSTIC		
Self test		12.1 Self test diagnostic function
Test display		12.2 Function tests physical display
Flow sim. =	ON	12.3 Flow rate simulation enabling
Display measures		12.4 Display internal measured value
Disp. Coom. Vars		12.5 Display comm. diagnostic values
Firmware info		12.6 Firmware version/revision
S/N=	999001	12.7 Board serial number
WT=	0002:21:00 : 22	12.8 Total working time


9-Display
10-Data logger
11-Functions
12-Diagnostic
13-System

SYSTEM

SYSTEM		
L1 code =	*****	13.1 Access level 1 code
L2 code =	*****	13.2 Access level 2 code
L3 code =	*****	13.3 Access level 3 code
L4 code =	*****	13.4 Access level 4 code
L5 code =	*****	13.5 Access level 5 code
L6 code =	*****	13.6 Access level 6 code
Restr. Access=	ON	13.7 Restricted access level
010.011.012.013		13.8 Device IP network address
010.011.012.014		13.9 Client IP network address
255.255.255.000		13.10 Network mask
KT	0.96469	13.11 Calibration coefficient KT
KS	1.00000	13.12 Calibration coefficient KF
KR	1.00000	13.13 Calibration coefficient KR
Stand-by	3453	13.14 Stand-by
FW update	14718	13.15 firmware update

9-Display
10-Data logger
11-Functions
12-Diagnostic
13-System

ACCURACY

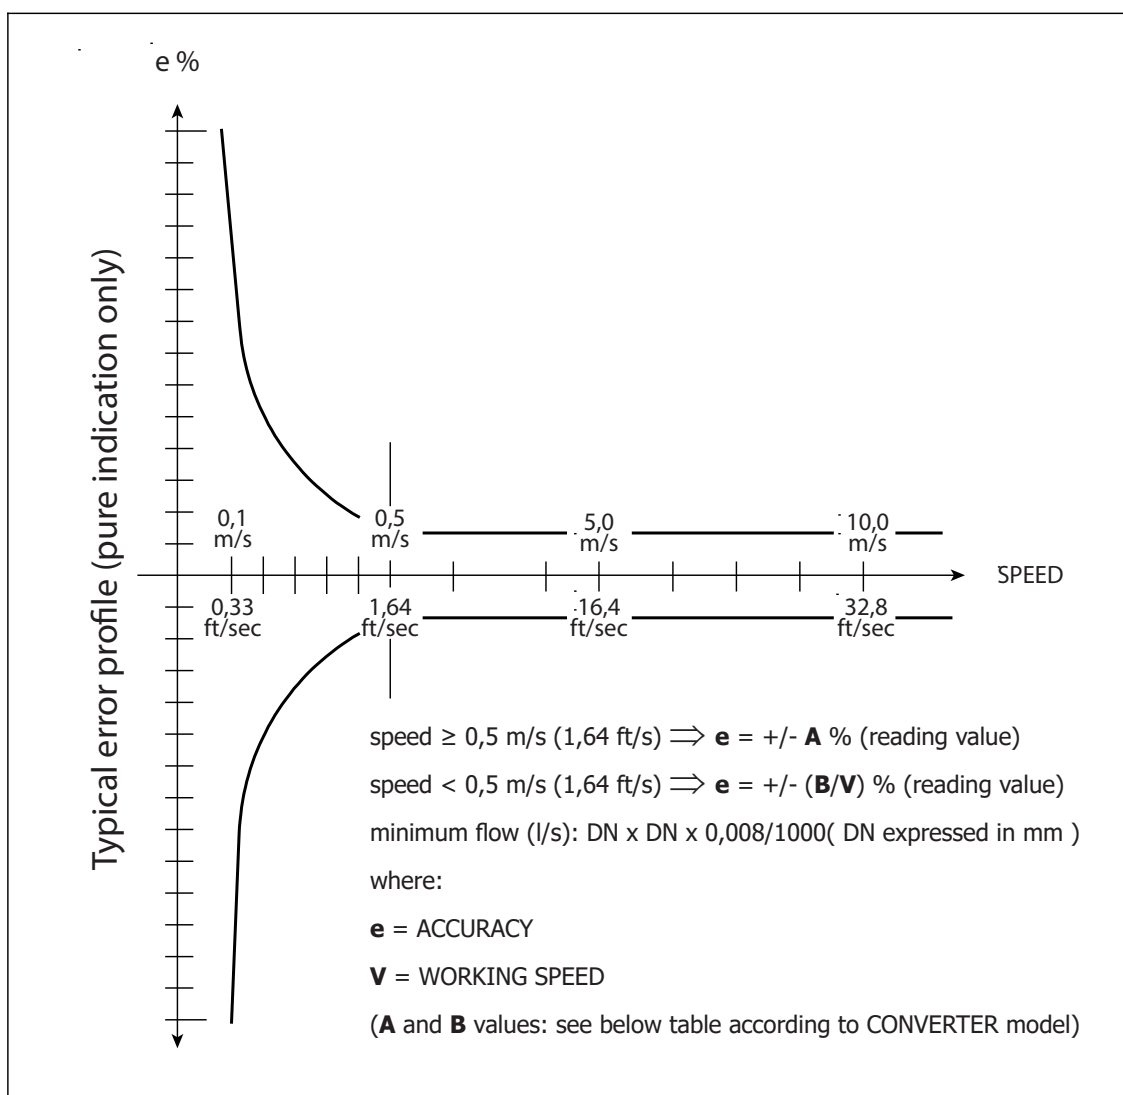

Full bore Sensor

MS501/MS1000/MS2410/MS2500			MS 600			MS5000		
A	B(m/s)	B(ft/s)	A	B(m/s)	B(ft/s)	A	B(m/s)	B(ft/s)
0,8*	0,4**	1,31**	0,8*	0,4**	1,31**	2	1	3,28

* = 0,4 (special)

**= 0,2(m/s) ; 0,66(ft/s) - special

Insertion sensor

See sensor DATA SHEET

Reference conditions below and as per internal testing procedures:

- Constant flow rate during the test
- Pressure: >30 Kpa
- Flow condition : fully developed flow profile
- Zero stability $\pm 0,005 \%$

MI-001 OIML R49 CLASS1: MV110W

The **MS2500** sensor's diameters listed below, coupled with **MV110W**, are certified according to European Directive 2014/32/EU category MI-001 (OIML R49)

SIZE		Q3	Q2	Q1	R
mm	inch	m3/h			Q3/Q1
25	1	16	0,26	0,16	100
32	1 ¼	25	0,40	0,25	
40	1 ½	40	0,64	0,40	
50	2	63	1,01	0,63	
65	2 ½	100	1,6	1,00	
80	3	160	2,6	1,60	
100	4	250	4,0	2,50	
125	5	400	6,4	4,00	
150	6	630	10,1	6,30	
200	8	1000	16	10,00	
250	10	1600***	26	16,0	
300	12	2500**	40	25	
350	14	2500**	40	25	
400	16	4000**	64	40	
450	18	4000**	64	40	
500	20	6300	101	63	
600	24	10000	160	100	
700	28	10000	160	100	
800	32	16000*	256	160	
900	36	16000*	256	160	
1000	42	25000*	400	250	

SIZE		Q3	Q2	Q1	R
mm	inch	m3/h			Q3/Q1
25	1	16	0,10	0,064	250
32	1 ¼	25	0,16	0,10	
40	1 ½	40	0,26	0,16	
50	2	63	0,40	0,25	
65	2 ½	100	0,64	0,40	
80	3	160	1,0	0,64	
100	4	250	1,6	1,0	
125	5	400	2,6	1,6	
150	6	630	4,0	2,5	
200	8	1000	6,4	4,0	
250	10	1600***	10	6,4	
300	12	2500**	16	10	
350	14	2500**	16	10	
400	16	4000**	26	16	
450	18	4000**	26	16	
500	20	6300	40	25	
600	24	10000	64	40	
700	28	10000	54	40	
800	32	16000*	102	64	
900	36	16000*	102	64	
1000	42	25000*	160	100	

(*) : Calibration flowrate 14000 m3/h - as for max rig flowrate L8

(**) : Calibration flowrate 1400 m3/h - as for max test rig flowrate L7

(***) Calibration flowrate 1100 m3/h - as for max test rig flowrate L6

MI-001 OIML R49 CLASS 2: MV110W

The **MS2500** sensor's diameters listed below, coupled with **MV110W** comply with the European directive:

DIRECTIVE 2014/32/EU (MID) ANNEX III (MI-001) AND 2015/13/EU- OIML R49

SIZE		Q3	Q2	Q1	R
mm	inch	m3/h			Q3/Q1
25	1	16	0,16	0,10	160
32	1 ¼	25	0,25	0,16	
40	1 ½	40	0,40	0,25	
50	2	63	0,63	0,39	
65	2 ½	100	1,0	0,63	
80	3	160	1,6	1,0	
100	4	250	2,5	1,6	
125	5	400	4,0	2,5	
150	6	630	6,3	3,9	
200	8	1000	10	6,3	
250	10	1600***	16	10	
300	12	2500**	25	15,625	
350	14	2500**	25	15,625	
400	16	4000**	40	25	
450	18	4000**	40	25	
500	20	6300	63	39,375	
600	24	10000	100	62,5	
700	28	10000	100	62,5	
800	32	16000*	160	100	
900	36	16000*	160	100	
1000	42	25000*	250	156,25	

SIZE		Q3	Q2	Q1	R
mm	inch	m3/h			Q3/Q1
25	1	16	0,10	0,06	250
32	1 ¼	25	0,16	0,10	
40	1 ½	40	0,26	0,16	
50	2	63	0,40	0,25	
65	2 ½	100	0,64	0,40	
80	3	160	1,0	0,64	
100	4	250	1,6	1,0	
125	5	400	2,6	1,6	
150	6	630	4,0	2,5	
200	8	1000	6,4	4,0	
250	10	1600***	10	6,4	
300	12	2500**	16	10	
350	14	2500**	16	10	
400	16	4000**	26	16	
450	18	4000**	26	16	
500	20	6300	40	25	
600	24	10000	64	40	
700	28	10000	54	40	
800	32	16000*	102	64	
900	36	16000*	102	64	
1000	42	25000*	160	100	

(*) : Calibration flowrate 14000 m3/h - as for max rig flowrate L8

(**) : Calibration flowrate 1400 m3/h - as for max test rig flowrate L7

(***) Calibration flowrate 1100 m3/h - as for max test rig flowrate L6

SIZE		Q3	Q2	Q1	R
mm	inch	m3/h			Q3/Q1
25	1	16	0,06	0,04	400
32	1 ¼	25	0,10	0,06	
40	1 ½	40	0,16	0,10	
50	2	63	0,25	0,16	
65	2 ½	100	0,40	0,25	
80	3	160	0,64	0,40	
100	4	250	1,0	0,63	
125	5	400	1,6	1,0	
150	6	630	2,5	1,6	
200	8	1000	4,0	2,5	
250	10	1600***	6,4	4,0	
300	12	2500**	10	6,3	
350	14	2500**	10	6,3	
400	16	4000**	16	10	
450	18	4000**	16	10	
500	20	6300	25	16	
600	24	10000	40	25	
700	28	10000	40	25	
800	32	16000*	64	40	
900	36	16000*	64	40	
1000	42	25000*	100	63	


(*) : Calibration flowrate 14000 m3/h - as for max rig flowrate L8

(**) : Calibration flowrate 1400 m3/h - as for max test rig flowrate L7


(***) Calibration flowrate 1100 m3/h - as for max test rig flowrate L6

The manufacturer guarantees only English text available on our web site www.isoil.com

MPE - MI 001 - OIML R49 ACCURACYCLASS 1
(OIML R 49-1:2013 (E) - ISO4064-1:2017)

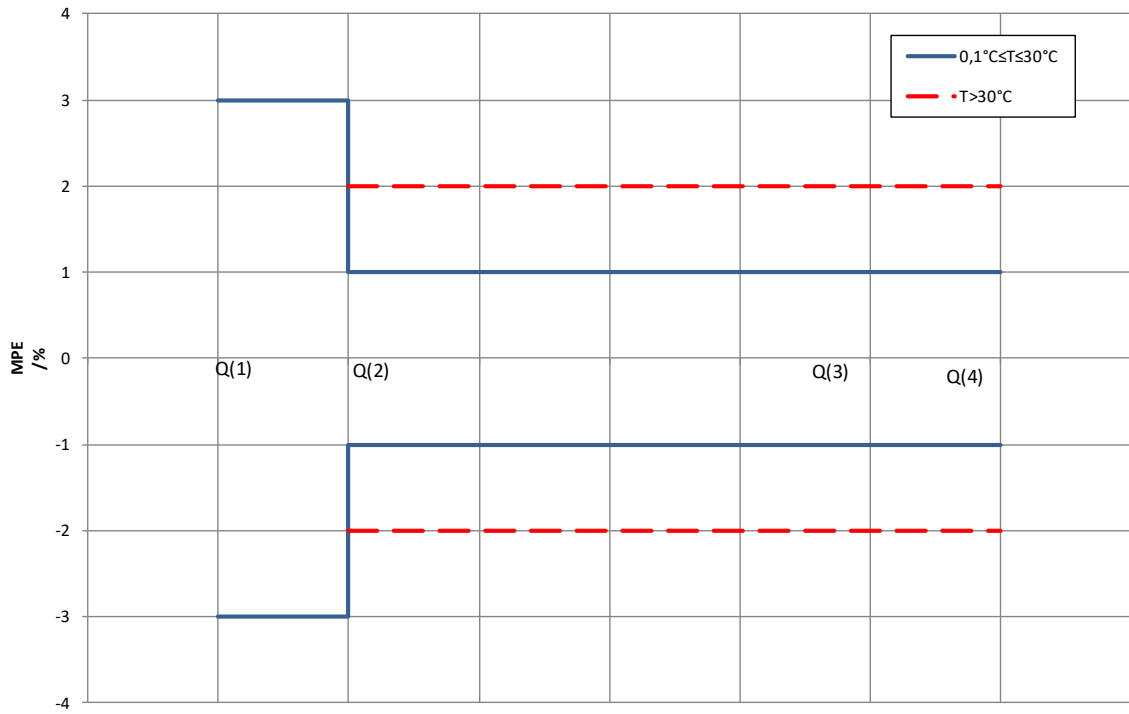

MPE - MI 001 - OIML R49 ACCURACYCLASS 2
(OIML R 49-1:2013 (E) - ISO4064-1:2017)

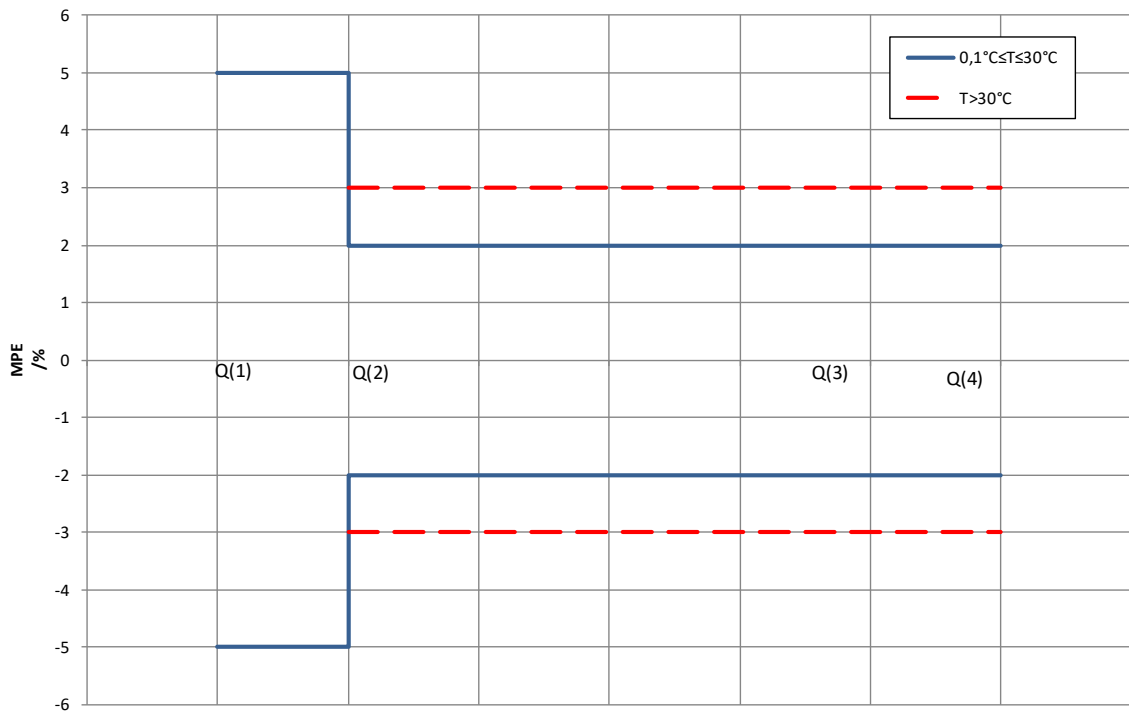

MI-004 OIML R75 CLASS1: MV110W

The **MS2500** sensor's diameters listed below, coupled with **MV110W** comply with the European directive: DIRECTIVE 2014/32/EU (MID) ANNEX VI (MI-004) - OIML R75

SIZE		q _p	q _s	0,1 q _p	q _i	MC
mm	inch	m3/h				q _p /q _i
25	1	16	16	1,6	0,16	100
32	1 ¼	25	25	2,5	0,25	
40	1 ½	40	40	4	0,40	
50	2	63	63	6,3	0,63	
65	2 ½	100	100	10	1,00	
80	3	160	160	16	1,60	
100	4	250	250	25	2,50	
125	5	400	400	40	4,0	
150	6	630	630	63	6,3	
200	8	1000	1000	100	10	
250	10	1600*	1600	160	20,00	80
300	12	2500*	2500	250	31,25	
350	14	2500*	2500	250	31,25	
400	16	4000*	4000	400	50,00	

SIZE		q _p	q _s	0,1 q _p	q _i	MC
mm	inch	m3/h				q _p /q _i
25	1	10	16	1	0,2	50
32	1 ¼	16	25	1,6	0,32	
40	1 ½	25	40	2,5	0,5	
50	2	40	63	4	0,8	
65	2 ½	63	100	6,3	1,26	
80	3	100	160	10	2	
100	4	160	250	16	3,2	
125	5	250	400	25	5	
150	6	400	630	40	8	
200	8	630	1000	63	12,6	
250	10	1000	1600	100	20	
300	12	1600*	2500	160	32	
350	14	2500*	2500	250	50	
400	16	2500*	4000	250	50	


SIZE		q _p	q _s	0,1 q _p	q _i	MC
mm	inch	m3/h				q _p /q _i
25	1	10	16	1	0,4	25
32	1 ¼	16	25	1,6	0,64	
40	1 ½	25	40	2,5	1	
50	2	40	63	4	1,6	
65	2 ½	63	100	6,3	2,52	
80	3	100	160	10	4	
100	4	160	250	16	6,4	
125	5	250	400	25	10	
150	6	400	630	40	16	
200	8	630	1000	63	25,2	
250	10	1000	1600	100	40	
300	12	1600*	2500	160	64	
350	14	2500*	2500	250	100	
400	16	2500*	4000	250	100	

SIZE		q _p	q _s	0,1 q _p	q _i	MC
mm	inch	m3/h				q _p /q _i
25	1	10	16	1	1	10
32	1 ¼	16	25	1,6	1,6	
40	1 ½	25	40	2,5	2,5	
50	2	40	63	4	4	
65	2 ½	63	100	6,3	6,3	
80	3	100	160	10	10	
100	4	160	250	16	16	
125	5	250	400	25	25	
150	6	400	630	40	40	
200	8	630	1000	63	63	
250	10	1000	1600	100	100	
300	12	1600*	2500	160	160	
350	14	2500*	2500	250	250	
400	16	2500*	4000	250	250	

(*) : Flow rates reduced to the limits of the system

The manufacturer guarantees only English text available on our web site www.isoil.com

MI 004 - MPE - ACCURACY CLASS 1
(UNI EN 1434-1:2016)

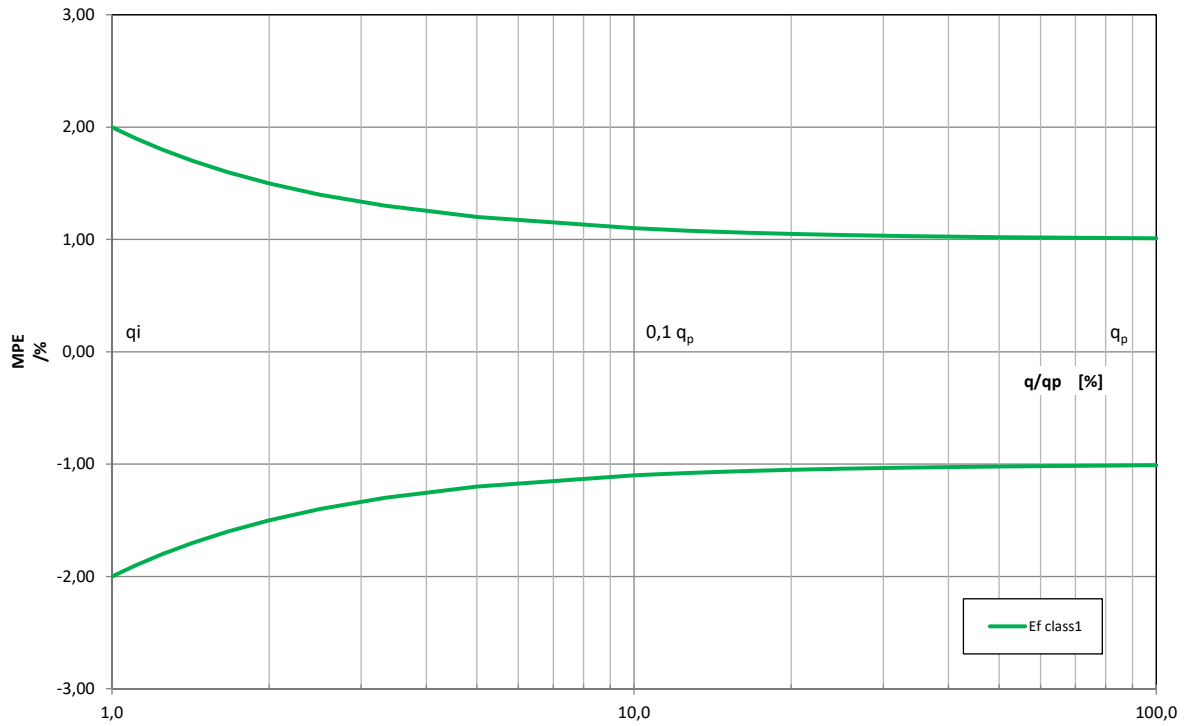

(*) : Reduced flowrates to the test rig limits

HOW TO ORDER

CODE EXAMPLE	CODE/DESCRIPTION	
Display		
A	A	Blind version (without display and programming keys, cable USB type A/USB MINI B is REQUIRED TO PROGRAMMING)
	B	Graphic LCD WSTN - B/W - back light display, point matrix 128 x 64, 8 line/16 characters and 3 programming keys (mandatory for MI001)
Housing material / Protection rate		
0	0	Nylon PA6 with fiber glass, protection rate IP 67
	1	Painted aluminum die casting, protection rate IP67
	2	Painted aluminum die casting, protection rate IP68 1,5 meters under water, Compact Version, n° 1 IP 68 MIL connector for power supply (CONNECTORS SUPPLIED: MALE + FEMALE)
	3	Painted aluminum die casting, protection rate IP68 1,5 meters under water, Compact Version, Complete of n° 1 of 10 poles IP68 MIL connector (outputs connections to be specified) and n° 1 IP 68 MIL connector for power supply (CONNECTORS SUPPLIED: MALE + FEMALE)
	4	Painted aluminum die casting, protection rate IP68 1,5 meters under water, Separate Version, Complete of n° 1 IP 68 MIL connectors for cable from the sensor and n° 1 IP 68 MIL connector for power supply (CONNECTORS SUPPLIED: MALE + FEMALE)
	5	Painted aluminum die casting, protection rate IP68 1,5 meters under water, Separate Version, Complete of n° 1 IP 68 MIL connectors for cable from the sensor, n° 1 of 10 poles IP68 MIL connector (outputs connections to be specified) and n° 1 IP 68 MIL connector for power supply (CONNECTORS SUPPLIED: MALE + FEMALE)
	6	AISI304 Stainless Steel housing, protection rate IP67 (DISPLAY NOT ROTABLE) - NO CONNECTORS AVAILABLE
	7	Painted aluminum die casting, ONLY COMPACT, protection rate IP68 (NO CONNECTORS)
Version		
A	A	Compact version with sensor MS.... (liquid maximum temperature 100 °C)
	B	Separate version for wall mounting, complete with mounting accessories (CABLE C014)
	C	Compact version with display visible from the top
	D	Separate version (CABLE C014) for wall mounting, complete with mounting accessories in AISI 304
Power supply		
1	1	Power supply : 100 ... 240 VAC 44/66 Hz (NOT FOR MI001)
	2	Power supply : 24 ... 36 VAC/VDC 0...44/66 Hz (NOT FOR MI001)
	3	Power supply : 12...48 VDC (NOT FOR MI001)
	4	Power supply : 100 ... 240 VAC 44/66 Hz + 1 Rechargeable back-up Battery (the use of battery supports only the measure UP TO 30 days; all the outputs are set to OFF) (NOT FOR MI001)
	5	Power supply : 24 ... 36 VAC/VDC 0...44/66 Hz + 1 Rechargeable back-up Battery (the use of battery supports only the measure UP TO 30 days; all the outputs are set to OFF) (NOT FOR MI001)
	6	Power supply : 12...48 VDC + 1 Rechargeable back-up Battery (the use of battery supports only the measure UP TO 30 days; all the outputs are set to OFF) (NOT FOR MI001)
	7	Power supply : 100 ... 240 VAC 44/66 Hz + n° 1 SETTINGS FOR Rechargeable back-up Battery (the Rechargeable Battery is NOT included) (NOT FOR MI001)
	8	Power supply : 24 ... 36 VAC/VDC 0...44/66 Hz + n° 1 SETTINGS FOR Rechargeable back-up Battery (the Rechargeable Battery is NOT included) (NOT FOR MI001)
	9	Power supply : 12...48 VDC + n° 1 SETTINGS FOR Rechargeable back-up Battery (the Rechargeable Battery is NOT included) (NOT FOR MI001)
	a	Power supply : 100 ... 240 VAC 44/66 Hz + 1 Pack of n° 2 SUPERCAP (the use of it supports only the measure UP TO 3 minutes; all the outputs are set to OFF) Suitable for MI001
	b	Power supply : 24 ... 36 VAC/VDC 0...44/66 Hz + 1 Pack of n° 2 SUPERCAP (the use of battery supports only the measure UP TO 3 minutes; all the outputs are set to OFF) Suitable for MI001
	c	Power supply : 12...48 VDC + 1 Pack of n° 2 SUPERCAP (the use of battery supports only the measure UP TO 3 minutes; all the outputs are set to OFF) Suitable for MI001
Analogue output		
A	A	Without Analogue output
Digital Input/Output		
0	0	With Digital Input only
	1	With n° 1 PROGRAMMABLE Digital Output/n°1 Digital Input (mandatory for MI004)
Communication Gateway		
A	A	Without Gateway
Protocols		
0	0	Without Protocol

Accuracy		
A	A	Standard accuracy 0,8 %
	B	Special accuracy 0,4 %
	C	Special accuracy (to be defined)
Data Logger		
0	0	Without Data Logger
Special Features		
A	A	NONE
	B	WITH ANTICONDENSE CAP
	C	n° 5 CABLE GLAND 1/2" NPT - Nickel plated brass CODE 1.609.1200.70 (CABLE 6 - 12 mm)
	D	n° 5 HOLES FOR CABLE GLAND 1/2" NPT (WITHOUT CABLE GLAND)
MID Approval		
0	0	NONE
	1	MI-001/OIMLR49-CLASS 1 (Pover Supply Code shall be a or b or c)
	2	MI-001/OIMLR49-CLASS 2 (Pover Supply Code shall be a or b or c)
	3	MI-004-CLASS 1

Complete code
example for
order



MV110W-A0A1A0A0A0A0

ISOIL INDUSTRIA S.p.A.

HEAD OFFICE	SERVICE
Via Fratelli Gracchi, 27 20092 Cinisello Balsamo (MI) Tel +39 02 66027.1 Fax +39 02 6123202 sales@isoil.it	service@isoil.it

If you want to find the complete list of our distributors access at the following link:
<http://www.isoil.it/en>



Due to the constant technical development and improvement of its products, the manufacturer reserves the right to make changes and/or modify the information contained in this document without notice.